HERO 海烙

COMPANY
PROFILE
公司简介





信达消防，高新技术企业，气体灭火系统研发、制造商，拥有设计、施工、维保、检测、安全评估等消（安）防服务资质及能力，“智慧消防”践行者，致力于为全球客户提供一站式消、安防解决方案。

公司专注用户体验，关注科技与责任，立足重塑用户与消防产品、服务供给者的关系，不断创新服务业态，助力提升用户消（安）防责任意识及消（安）防管理能力，针对通信、电力、交通、金融、市政等20多个行业领域定制个性化消（安）防产品及技术服务方案，并提供大数据支持。公司提供的海烙气体灭火系统及消（安）防技术服务在APEC会议、G20杭州峰会、厦门金砖五国会议、南极科考基地等重要项目中发挥了积极的保障作用。

信达消防秉承“因信而生　止于至善”的企业核心价值观，坚持开放协同、持续创新的经营理念，强化组织建设，努力沉淀企业文化，发扬传承“工匠精神”不断提升服务能力，竭力将企业打造成为中国高科技消防企业发展的典范、消防技术与服务创新的典范、消防智能制造与集成物联结合的典范！

Xinda fire-fighting, high-tech enterprise, gas fire-fighting system R & D, manufacturer, possess the anti-service qualification and capability of design, construction, maintenance, detection, safety assessment, etc., and "intelligent fire-fighting" to provide one-stop and security solution for global customers.

Focusing on the user experience, focusing on technology and responsibility, based on reshaping the relationship between users and fire products, service providers, continuous innovation of service formats, help to enhance users' awareness of anti- (safety) responsibility and anti- (safety) management ability, customized anti- (safety) products and technical services for communications, electricity, transportation, finance, municipal and more than 20 industries, and provide big data support. The company's fire-extinguishing systems and anti-safety technology services have played an active role in the APEC Conference, the G20 Hangzhou Summit, the BRICS Conference in Xiamen and the Antarctic Science Base.

Xinda Fire-fighting adheres to the core values of the "to be good at the end of the letter", and adheres to the management concept of open and cooperative and continuous innovation, strengthens the construction of the organization, tries to settle the enterprise culture, and carries forward the continuous "the spirit of the craftsman" to promote the service ability. Strive to build the enterprise into a model of the development of high-tech fire-fighting enterprise in China, the model of fire-fighting technology and service innovation, the model of intelligent manufacturing of fire-fighting and the combination of integrated materials.

2023年（第一版）

浙江信达可恩消防股份有限公司
公司总部：中国浙江海宁高新技术产业园区聆涛路6号
销售：中国杭州江干区凤起东路358号五福天星龙大厦B座1201
总部电话：0086-573-87969119
传真：0086-573-87969209 邮编：314423
浙江销售电话：0086-571-85392119
传真：0086-571-85392919 邮编：310014
http://www.cohenthinktank.com E-mail:Zjtt@vip.sina.com
全国服务热线：4008 501 119

Cohen Think Tank Fire(zhejiang)company
Company headquarters:6 Lingtao Road Haining
high-tech industrial Zone
Sale:No.1201 of B block, Wu Fu Tian Xinglong building, No.358
of Feng Qi West Rd,Jiang Gan zone, Hangzhou, China
Headquarters Tel:0086-573-87969119
Fax:0086-573-87969209 Postcode:314423
Sale Tel:0086-571-85392119
Fax:0086-571-85392919 Postcode:310014
Http://www.cohenthinktank.com E-mail:Zjtt@vip.sina.com
National service hotline：4008 501 119

HERO 海烙

感温电磁启动型XQQWC系列
感温电动启动型XQQWQ系列


海烙悬挂式七氟丙烷气体灭火装置

安装方便 | 维护简便 | 性能可靠 | 经济实用

Fire Think Tank® FIRE STOPPER 信达消防

浙江信达可恩消防股份有限公司
Cohen Think Tank Fire(zhejiang)company

悬挂式七氟丙烷气体灭火装置



感温电磁启动型XQQWC系列



感温电动启动型XQQWQ系列

悬挂式七氟丙烷气体灭火装置型号、规格及主要性能参数

型号规格	容 积（L）	充装系数（kg/m³）	启动温度（℃）	喷嘴通径（mm）	保护半径（m）	保护高度（m）
感温电磁型 XQQWC10/1.6-HERO	10	1150	68±3	Φ10	7.5	≤6.5
感温电磁型 XQQWC20/1.6-HERO	20	1150	68±3	Φ14	7.5	≤6.5
感温电磁型 XQQWC30/1.6-HERO	30	1150	68±3	Φ17	7.5	≤6.5
感温电动启动型 XQQWQ40/1.6	40	1150	68±3	Φ20	7.5	≤6.5
感温电动启动型 XQQWQ50/1.6	50	1150	68±3	Φ22	7.5	≤6.5
感温电动启动型 XQQWQ60/1.6	60	1150	68±3	Φ24	7.5	≤6.5

悬挂式七氟丙烷气体灭火装置特点

- 安装简便，无需专门瓶组间；
- 安集电磁（电动）、感温两种启动方式于一体，可靠性高，启动速度快；
- 灭火装置使用寿命长，维护简单；
- 装有火灾自动报警系统，可实现自动启动、机械启动，安全性高；
- 安全环保。无毒、无害符合环保要求；
- 在装置上安装有信号反馈装置，实现时时监控；
- 适合无人值守而需重点保护的设备和场所；

本产品适合下列场所

- 无人值守的通信基站、变配电室和不间断电源室。
- 通讯系统的机房、基站、程控交换机房、控制室和信令转接点室。
- 电讯中心、软件数据库、图书馆、博物馆、银行金库。
- 电子计算机房、控制室、电子设备间、配电房、发电机房、变配电间。

制造最可靠的灭火系统
www.cohenthinktank.com



悬挂式七氟丙烷感温电磁启动型灭火剂瓶组

七氟丙烷灭火剂以1.6MPa/20℃储存于容器中，可用感温玻璃球作为启动元件，亦可用电磁铁作为启动元件，可两个以上联动启动，可安装在建筑构件的顶部或壁挂在侧墙上。



悬挂式七氟丙烷感温电动启动型灭火剂瓶组

七氟丙烷灭火剂以1.6MPa/20℃储存于容器中，可用感温玻璃球作为启动元件，亦可用微电机作为启动元件，可两个以上联动启动，可安装在建筑构件的顶部或壁挂在侧墙上。

容器阀（感温电磁启动型）

安装在灭火剂瓶体上，能实现感温启动和电磁铁启动。






容器阀（感温电动启动型）

安装在灭火剂瓶体上，能实现感温启动和微电机启动。

信号反馈装置

信号反馈装置安装在连接弯头上，当灭火剂喷放时送出信号。该装置可自锁，有动作显示，装置恢复正常运行需人工复位。

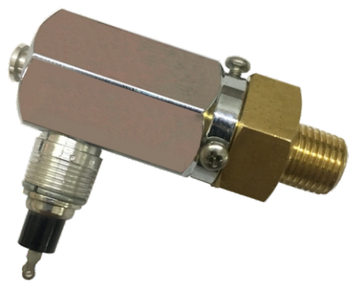



小规格壁挂式支架

壁挂式支架能承受3倍以上灭火装置挂重，安装于建筑构件侧墙上，壁挂10L，20L，30L悬挂式灭火装置

大规格壁挂式支架

壁挂式支架能承受3倍以上灭火装置挂重，安装于建筑构件侧墙上，壁挂40L，50L,60L悬挂式灭火装置。





顶吊式支架

顶吊式支架能承受3倍以上灭火装置挂重，安装于建筑构件侧墙上，顶吊10L，20L，30L悬挂式灭火装置。



压力表

装置使用压力范围：1.3～2.5MPa（绿区）；当压力表指针低于绿区时，需及时补充药剂或者氮气。

微电机驱动装置

电动型驱动装置由微电机和穿刺刀组成，安装在容器阀启动口上，当接到火灾自动报警控制器信号时，微电机启动，刺破膜片，开启容器阀。





电磁型驱动装置

电磁型驱动装置由微电机和穿刺刀组成，安装在容器阀启动口上，当接到火灾自动报警控制器信号时，电磁铁启动，刺破膜片，开启容器阀。